

**MDA HT Series**
SMD Moulded Inductor
Size 5040



Dimensions: [mm]

Land Pattern: [mm]

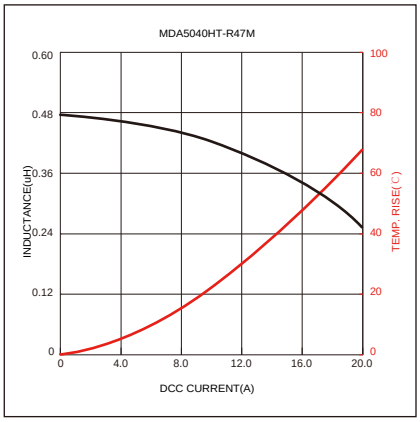


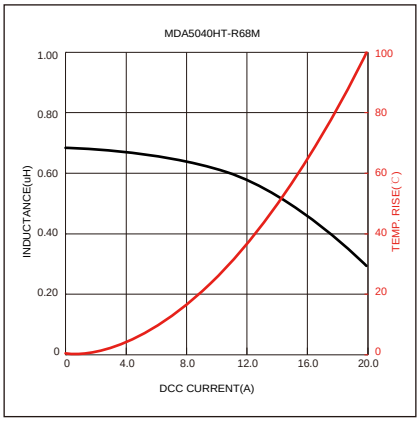
Electrical Properties:

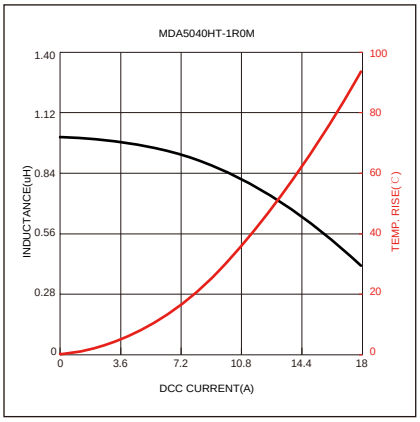
| Part No | Inductance @ 100KHz/1V | Tolerance | Temperature Rise Current | Current Typ. (A) | DC Resistance Typ. | DC Resistance Max. |
|---|---|---|---|---|---|---|
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

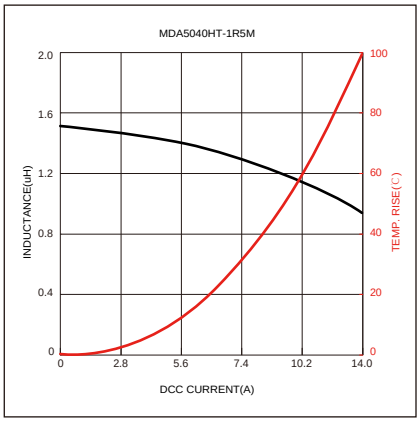
Saturation Current will cause L to drop approximately 35%
Temperature Rise Current: The actual value of DC current when the temperature rise is △T=40°C

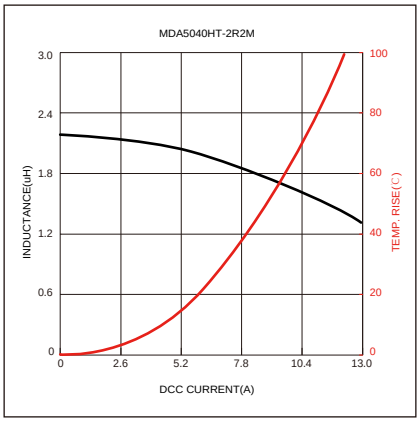
# Typical Electrical Characteristics:

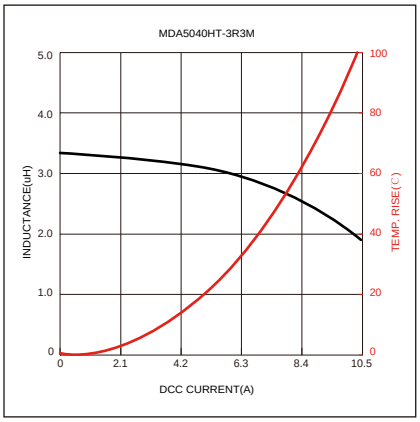


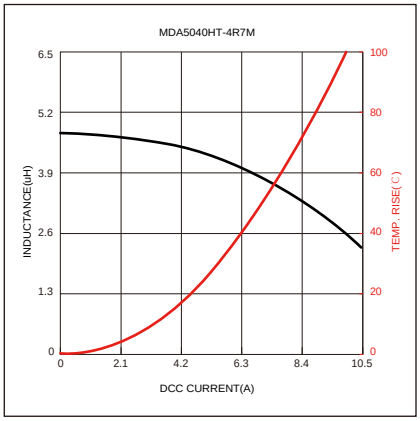



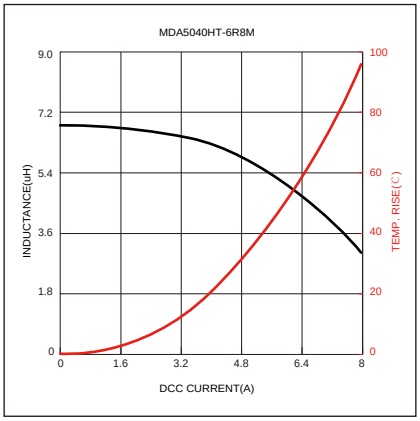



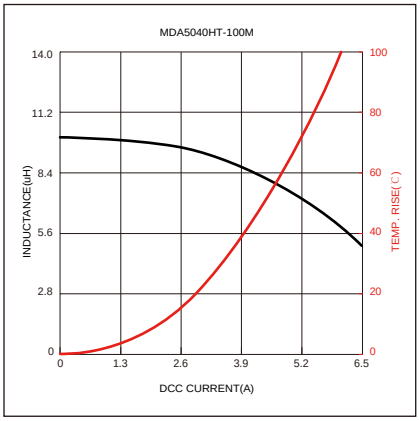



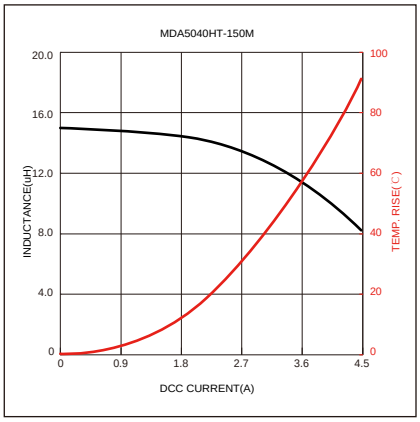



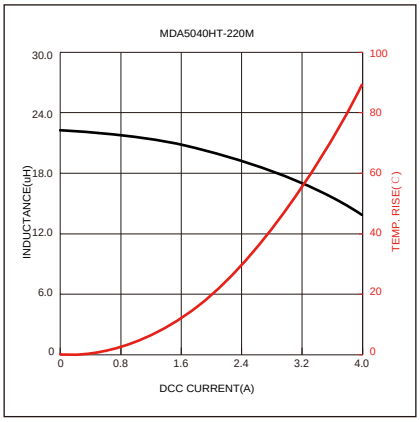



Reel Dimension：[mm]

Packaging Quantity: