
FEATURES

- , ,high e ciency.
- Very low acous c noise and very low leakage flux noise.
- AEC-Q200 qualified
- 100% Lead(Pb)-Free and RoHS compliant.
- Opera ng temperature: -55 to +155 °C (including self-temperature rise)
- Quan ty: 3000PCS

APPLICATION

- ADAS
- Headlamps, tail lamps and interior ligh ng
-
- Doors, window li and seat control
- Audio subsystem
- Digital instrument cluster
- In-Vehicle Infotainment and naviga on

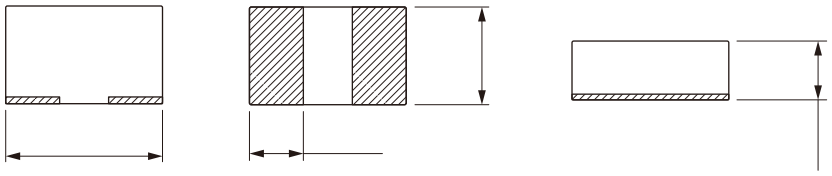

Part No								
MDTA20121A-R33M								
MDTA20121A-1R5M								

